Your trusted eSurveillance Solution Partner

The IP Security Solutions

3 Megapixel Pan-Tilt IP Camera

SICPT500
SICPT500E
SICPT500W

Day & Night, 3 Megapixel Pan-Tilt
H.264 MPEG4 MJPEG
2-way Audio Network Camera

- Full Pan-Tilt function
- Night Vision up to 10 meters
- Up to QXGA resolution at 20 FPS
- H.264 / MPEG4 / MJPEG multiple stream output for simultaneously live monitoring and high resolution recording
- Built-in Ethernet network interface (10/100Mbps)
- Built-in SD/SDHC memory card slot for local storage
- Built-in digital motion detection
- 3GPP Mobile surveillance support
- Two way audio

Product Overview

The cute device is the high performance IP Pan/Tilt camera with 5 Mega-pixel sensor. With high performance H.264 video compression, the file size of video stream is extremely reduced, as to optimize the network bandwidth efficiency. It has full Pan/Tilt function and 10X digital zoom feature for a larger space monitoring. The built-in SD/SDHC card slot provides a convenient and portable storage option for local storage of event and schedule recording, especially network disconnected. With the free-bundled 64-CH software for live view and recording, the IP camera is ideal for high performance and fullfill the variety usage in network serveillance applications.

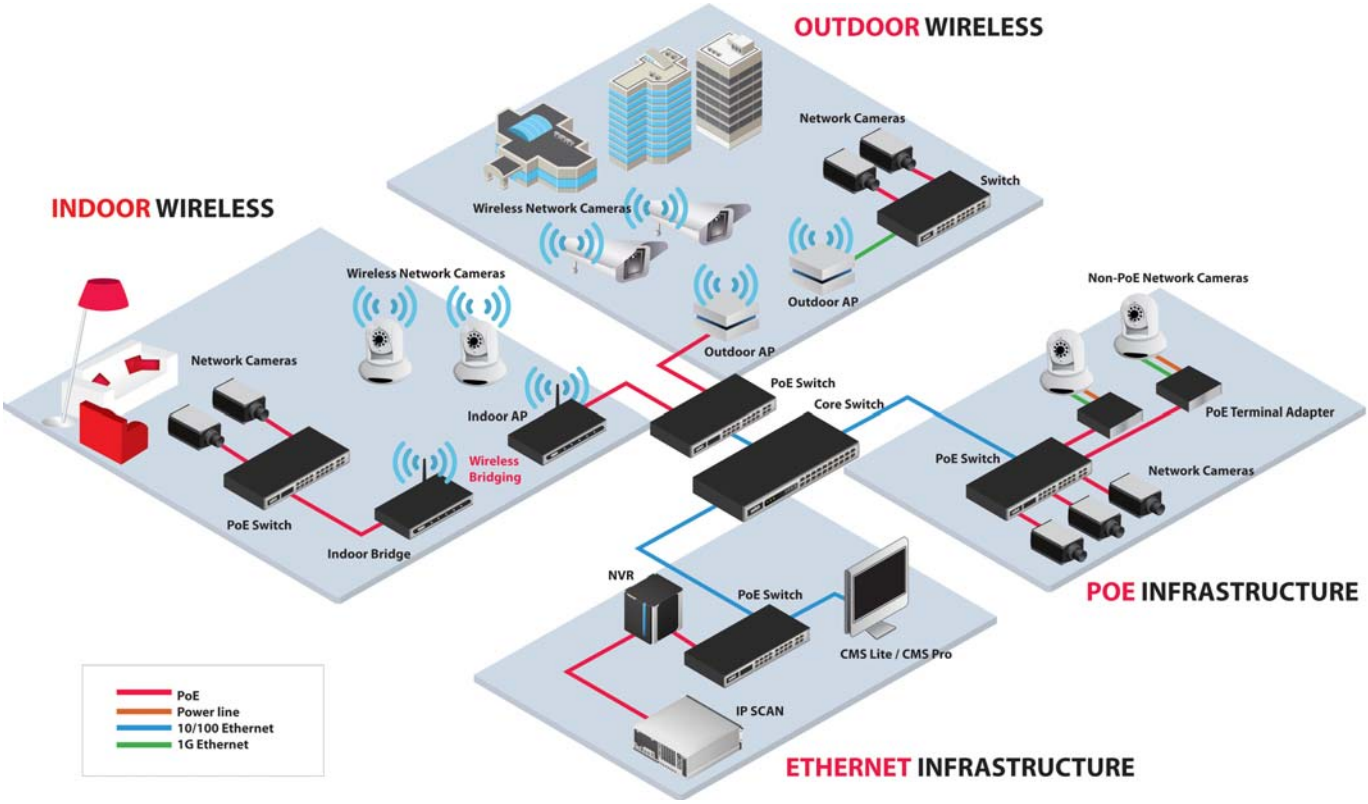

Specifications

Type		Wired		Wireless
Model No.		SICPT500	SICPT500E	SICPT500W
Description		3 Megapixel Pan-Tilt IP Camera	3 Megapixel Pan-Tilt IP Camera	3 Megapixel Wireless Pan-Tilt IP Camera
IR LED	LED Light Source	9 pcs LED; Wave Lengthen 850nm		
	Night Vision Distance	6 Meters (with IR LED on)		
Processor		DSP Base		
Sensor		5 Mega-pixel Color CMOS Sensor		
Lens		Fixed, f= 6.0mm F1.8		
Video Compression		H.264 HP/MP/BP, MPEG-4 SP, M-JPEG		
Pan-Tilt Rotation		Pan: 350±5° Tilt: 120±5°		
Resolution		QXGA (2048 x1536): 20 fps, 1080p (1920 x 1080): 30 fps, 960p (1280 x 960): 30 fps, 720p (1280 x 720): 30 fps, D1(720x480):30fps, VGA (640 x 480): 30 fps, QVGA (320 x 240): 30 fps, QCIF (176 x 144): 30 fps		Smart Rate Control: QXGA (2048 x1536), 1080p (1920 x 1080), 960p (1280 x 960) 30fps @ 720p (1280 x 720), D1(720x480, VGA (640 x 480), QVGA (320 x 240), QCIF (176 x 144)
Muti-streaming		Yes	Yes	Yes
SD/SDHC Interface		Yes	Yes	Yes
PoE (IEEE802.3af)		NA	Yes	NA
Two-way Audio		Yes	Yes	Yes
Alarm Input/output		2x D/I, 1x D/O	2x D/I, 1x D/O	2x D/I, 1x D/O
Digial Zoom		10x	10x	10x
Network Video Device Communication Standard		Yes	Yes	Yes
Network Interface		10/100M	10/100M	10/100M
Wireless Interface	Wireless Standard	NA	NA	IEEE 802.11 b/g/n
	Encryption			WEP / WPA-PSK / WPS2-PSK
	Antinna			3dBi detachable x 1
Network Protocols		TCP/IP, IPV6/V4, UDP, ICMP, DHCP, NTP,DNS, DDNS, SMTP, FTP, HTTP, HTTPs, Samba, PPPoE, UPnP, Bonjour, RTP, RTSP, RTCP		
QoS Bandwidth Control		Yes	Yes	Yes
Muti-level User Access		Yes	Yes	Yes
IP Filter		Yes	Yes	Yes
3GPP Standard		Yes	Yes	Yes
Time Management		Manual Time Setting / Time Server and NTP support / Real Time Clock		
Event Management		Events Triggered by Motion detection or GPIO Image or Video Upload/Send over email ,FTP, samba Recording Video file to SD Card by schedule		
System Management		64-ch Management Software(ExpressView)		
Operation Temperature		0~40°C		
Certificate		CE, FCC		
Size		130 mm (D) x 72 mm (W) x 58 mm (H)		
Accessories		Wall Mount Kit, Power Supply, Manual CDROM		
Net Weight (gw)		270	285	295
Gross Weight (gw)		910	930	940

Management Software

Supported OS	Windows Vista / Window 7/ Window 8
Functions	Max. 64 Channel Monitoring Simultaneously
	Record / Play / Auto-detection / Audio Support
IP Finder	Auto-search All IP Cameras On The Network (Based on the compatible software develepment kit)

All other company names and products are trademarks or registered trademarks of their respective companies. We reserve the right to introduce modifications without notice.

Version : 13/04/08