
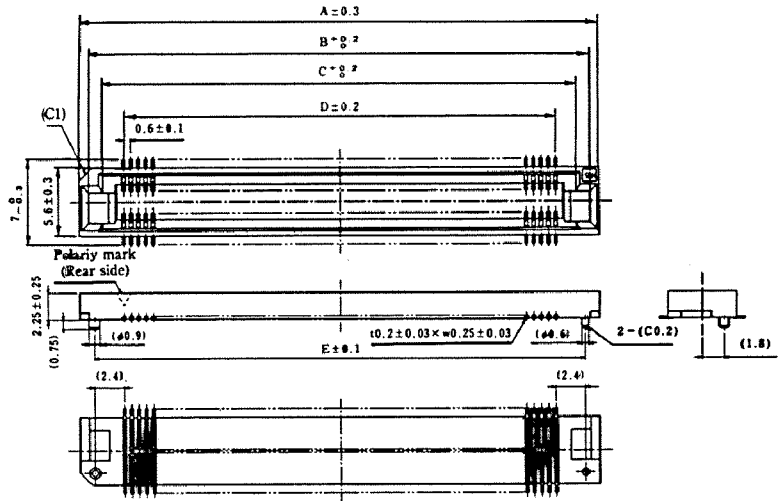


RECEPTACLES (SINGLE UNIT)

[FX8-※※S-SV]

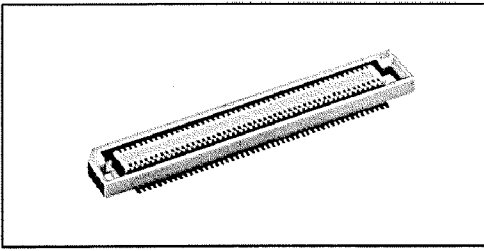

Unit: mm

HRS No.	Product No.	Number of Contacts	A	B	C	D	E	Tube Packaging Quantity (pcs)
CL578-0201-5-※※	FX8-60S-SV (※※)	60	24.60	23.05	20.80	17.40	22.20	21
CL578-0203-0-※※	FX8-80S-SV (※※)	80	30.60	29.05	26.80	23.40	28.20	17
CL578-0204-3-※※	FX8-90S-SV (※※)	90	33.60	32.05	29.80	26.40	31.20	15
CL578-0205-6-※※	FX8-100S-SV (※※)	100	36.60	35.05	32.80	29.40	34.20	14
CL578-0206-9-※※	FX8-120S-SV (※※)	120	42.60	41.05	38.80	35.40	40.20	12
CL578-0207-1-※※	FX8-140S-SV (※※)	140	48.60	47.05	44.80	41.40	46.20	10

※※ Blank: Tray packaging 21: Tube packaging 22: Embossed tape packaging


NOTE 1 : When ordering tube packaging, please do so in multiples of the tube packaging quantity.

NOTE 2 : Embossed tape packaging is available only for 60, 80, or 90-contact types. Connectors are sold by the reel with 1,000 pieces per reel. For details, see the section concerning the delivery form on Page 228 to 229.

◆ SINGLE UNIT RECOMMENDED PCB LAYOUT

Headers


[FX8-※※P-SV]
[FX8-※※P-SV1]

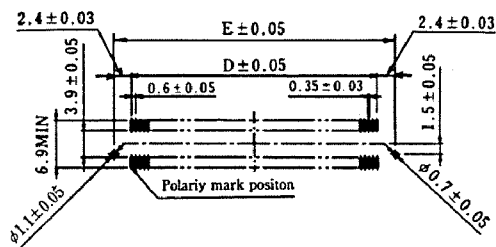

※ Recommended metal mask thickness: t = 0.15 mm

Receptacles

[FX8-※※S-SV]

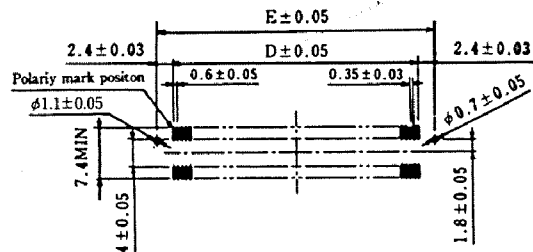

※ Recommended metal mask thickness: t = 0.15 mm
 ※ When the inside of the SMT pad (i.e., area beneath the connector mounting) has not been processed with insulating tape or some other material, that area is a pattern prohibited area.